



BOONDOCK
 8" | COMPOSITE SAFETY TOE | WATERPROOF
 TB0A131D001

30 Day US and Canada only



FEATURES:

- Premium waterproof leather with waterproof membrane
- Combination three-quarter Goodyear welt and cement heel construction
- Composite Safety Toe
- 1000g Thermolite[®] insulations
- Finger grip pull-on
- Non metallic puncture plate
- Molded Timberland PRO[®] rubber toe
- Padded top collar
- Cast hardware with dual-purpose top hooks
- Ever-guard[™] heel overlay
- Non-metallic shank
- Mesh lining with antimicrobial treatment for odor control

VIBRAM[®] FIRE&ICE[™] RUBBER OUTSOLE: WITH POLYURETHANE

MIDSOLE:

- Slip resistant
- Oil resistant per SATRA TM63
- Heat Resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Abrasion resistant
- Non Marking

DYNAMIC ANTI-FATIGUE TECHNOLOGY POLYURETHANE FOOTBED:

- Durable: resists compression set over time
- Resilient: recovers for next foot strike
- Mono-sided inverted Anti-Fatigue Technology cones
- Contoured bio-mechanically engineered top surface helps maintain proper gait
- Dynamic arch adapts to different foot shapes for maximum comfort
- Moisture-wicking open-cell top cover

7-11 12 13 14 15 W

USA Men's	7	7.5	8	8.5	9	9.5	10	10.5	11	12	13	14	15
USA Women's	8.5	9	9.5		10	10.5	11	11.5	12				
United Kingdom	6	6.5	7	7.5	8	8.5	9	9.5	10	11	12	13	14
Europe	39	40	41	41.5	42	42.5	43	43.5	44	46	47	48	49
Centimeters	25,0	26,0	26,0	26,5	27,0	27,5	28,0	28,5	29,0	30,0	31,0	32,0	33,0



BOONDOCK

8" | COMPOSITE SAFETY TOE | WATERPROOF

TB0A131D001

SLIP TEST RATING




No shoe is "slip proof." Footwear is one small part of any Slip Hazard Assessment Defense Program. You should always consult with your Company Safety Manager to determine the most appropriate footwear for your work environment. Using this information, it is possible to seek advice from the Manufacturer or Distributor regarding appropriate application based on test results.

EXCERPT FROM CSA Z195-14
 WHOLE SHOE SLIP RESULTS
 TEST REPORT: FWT0209034A/1244/Z
 OUTSOLE: PRO309 TEST LAB: 0248

The below chart provides the slip scores for the outsole of the shoe.

- HEEL / TALON / TALÓN
- FLAT / PLAT / PARTE PLANA
- MINIMUM REQUIRED / MINIMUM REQUIS / MÍNIMO REQUERIDO

CSA Z195-14

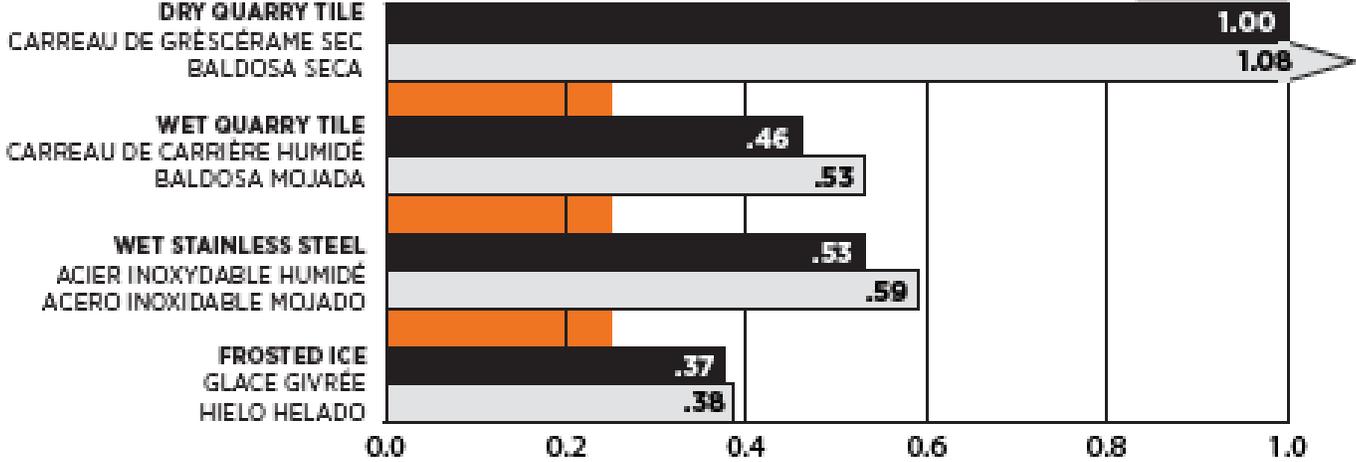



BOONDOCK

8" | COMPOSITE SAFETY TOE | WATERPROOF

TB0A131D001

- A. Composite Safety Toe
- B. Anti-Fatigue Technology PU Footbed
- C. Non-Metallic Shank
- D. Non-Metallic Puncture-Resistant Plate
- E. Lightweight, Cushioning PU Midsole
- F. Vibram® Fire&Ice™ Rubber Outsole

- A. Embout coqué en composite
- B. Semelle intérieure en PUR amortissante
- C. Tige non métallique
- D. Plaque résistante aux perforations non métallique
- E. Semelle intercalaire en PUR légère et coussinée
- F. Semelle extérieure Vibram® Fire&Ice™

- A. Punta de seguridad compuesta
- B. Plantilla de PU con tecnología anti-fatigue
- C. Cambrellón no metálico
- D. Placa no metálica resistente a perforaciones
- E. Entresuela ligera, acolchonada de PU
- F. Suela de caucho Vibram® Fire&Ice™

MEASUREMENTS:

(All measurements are external)


HIGHEST POINT ON COLLAR: 8" / 204 MM

LOWEST POINT ON COLLAR: 6 3/4" / 172 MM

LOWEST OPENING ON BOOT: 5 1/4" / 133 MM

WP MEMBRANE HEIGHT: 5 1/4" / 133 MM

HEEL BREADTH: 5/8" / 16 MM

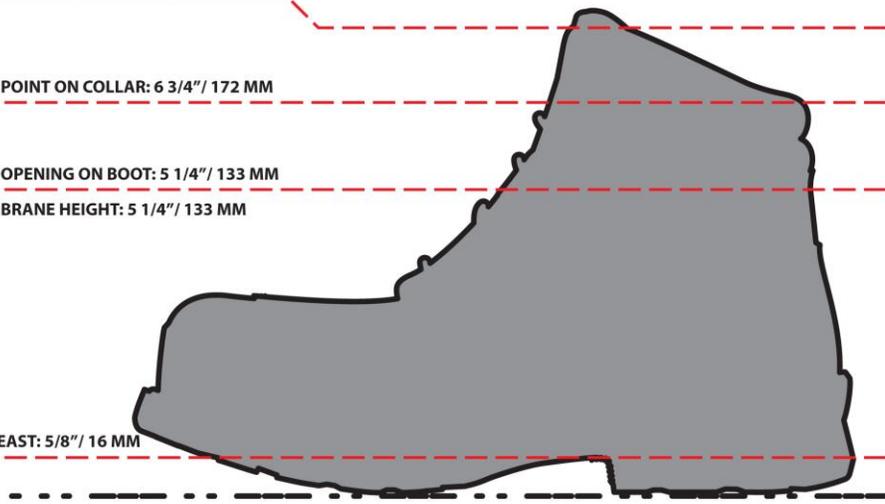



BOONDOCK

8" | COMPOSITE SAFETY TOE | WATERPROOF

TB0A131D001

TECHNOLOGIES



Composite Safety Toe

Lightweight, non-metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 Impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



Waterproof Membrane

Delivers maximum waterproof protection and blood-borne pathogen resistance. Meets ASTM F1671-07 safety standard.



Electrical Shock Resistant

Meets CAN/CSA-Z195-14 safety standards for footwear incorporating electric shock-resistant soles.



Puncture Resistant

Flexible non-metallic plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



Antimicrobial Odor Control

Treatment to help prevent and control odors.



Anti-Fatigue Technology

A comfort system designed with shock-absorbing, geometrical technology that returns energy back to the foot to deliver all-day support and comfort.



30-Day Comfort Guarantee

If you don't believe Timberland PRO® footwear with Anti-Fatigue Technology, PowerFit™ comfort system or SensorFlex™ technology are not more comfortable than the brand you're currently wearing, return them within 30 days and we'll refund your purchase price, provided you still have your dated receipt of purchase. Call 1-888-802-9947 from US and 1-800-501-3054 from Canada. Available in the United States and Canada only.



Vibram®

Outsoles built to withstand the harshest working environments.



Vibram® Fire & Ice™

Vibram® Fire&ICE™ compound maintains flexibility in freezing temperatures.