

# HIGHTOWER 6" | ALLOY SAFETY TOE TBOA1KJU214

















### **FEATURES:**

- Built on women's specific last for optimal fit and comfort
- Premium full-grain leather
- · Alloy safety toe shaped on women's last
- · Cement construction
- Metallic puncture plate
- Cast metal hardware
- · Antimicrobial treated lining for odor control
- Non-metallic shank
- Weight Size 7 725g

## ALL WEATHER THERMOPLASTIC URETHANE OUTSOLE POLYURETHANE OUTSOLE:

- Slip resistant
- Oil resistant per SATRA TM63
- Heat Resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- · Abrasion resistant
- Non Marking

## DYNAMIC ANTI-FATIGUE TECHNOLOGY POLYURETHANE FOOTBED:

- Durable: resists compression set over time
- Resilient: recovers for next foot strike
- Mono-sided inverted Anti-Fatigue Technology cones
- Contoured bio-mechanically engineered top surface helps maintain proper gait
- Dynamic arch adapts to different foot shapes for maximum comfort

## Women's 5.5-10 11 12

USA Men's	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	11	12
USA Women's	5.5	6	6.5	7	7.5	8	8.5	9	9.5		10	10.5	11	12	
United Kingdom	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	10	11
Europe	36	36.5	37	37.5	38	38.5	39	40	41	41.5	42	42.5	43	44	46
Centimeters	22,5	23,0	23,5	24,0	24,0	25,0	25,0	26,0	26,0	26,5	27,0	27,5	28,0	29,0	30,0




# HIGHTOWER 6" | ALLOY SAFETY TOE TBOA1KJU214





## **MEASUREMENTS:**

(All measurements are external)

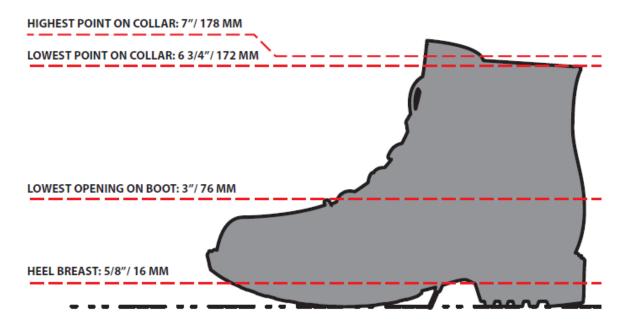



## HIGHTOWER 6" | ALLOY SAFETY TOE TB0A1KJU214



## **SLIP TEST RATING**



No shoe is "slip proof." Footwear is one small part of any Slip Hazard Assessment Defense Program. You should always consult with your Company Safety Manager to determine the most appropriate footwear for your work environment. Using this information, it is possible to seek advice from the Manufacturer or Distributor regarding appropriate application based on test results.

EXCERPT FROM CSA Z195-14 WHOLE SHOE SLIP RESULTS

TEST REPORT: CHT0250179

OUTSOLE: PRO434 TEST LAB: 12A10


The below chart provides the slip scores for the outsole of the shoe.

HEEL / TALON / TALÓN

FLAT / PLAT / PARTE PLANA

MINIMUM REQUIRED / MINIMUM REQUIS / MÍNIMO REQUERIDO

## CSA Z195-14

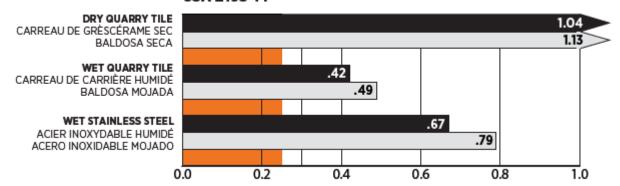



## **HIGHTOWER 6" | ALLOY SAFETY TOE** TB0A1KJU214





## **TECHNOLOGIES**



#### Made for Women

Designed specifically for women, Timberland PRO women's footwear is built with 3 distinctive points of comfort, including a more anatomical last, asymmetrical toe shape, and a low profile, resulting in a more feminine aesthetic.



#### Alloy Safety Toe

Lightweight, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



#### **Electrical Shock Resistant**

Meets CAN/CSA-Z195-14 safety standards for footwear incorporating electric shock-resistant soles.



### Puncture Resistant

Flexible, steel plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



## All-Weather TPU Outsole

Specially-formulated thermoplastic urethane compound designed to maintain flexibility in variable weather conditions, providing enhanced traction on wet and frosted ice surfaces, plus slip, oil and abrasion resistance.



## Antimicrobial Odor Control

Treatment to help prevent and control odors.



#### **Anti-Fatigue Technology**

A comfort system designed with shock-absorbing, geometrical technology that returns energy back to the foot to deliver all-day support and comfort.



#### **30-Day Comfort Guarantee**

If you don't believe Timberland PRO® footwear with Anti-Fatigue Technology, PowerFit or SensorFlex are not more comfortable than the brand you're currently wearing, return them within 30 days and we'll refund your purchase price, provided you still have your dated receipt of purchase. Call 1-888-802-9947 from US and 1-800-501-3054 from Canada. Available in the United States and Canada only.