


8" | COMPOSITE SAFETY TOE | WATERPROOF TB0A1RW2214







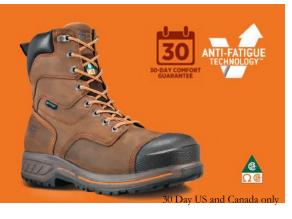











FEATURES:

- Premium full-grain waterproof leather with waterproof membrane
- Composite safety toe
- · Direct inject construction
- Non-metallic puncture plate
- · Mesh lining with antimicrobial treatment
- Non metallic shank
- Thermolite ® 200g insulation
- Brass eyelets with zinc dual purpose top hooks
- Weight 9M 1.57g

ALL-WEATHER THERMOPLASTIC URETHANE OUTSOLE POLYURETHANE MIDSOLE:

- · Slip resistant
- · Abrasion resistant
- Oil-resistant
- Heat resistant up to 248F using EN/ISO 20344:2004 (120C)
- Non-marking

DYNAMIC ANTI-FATIGUE TECHNOLOGY POLYURETHANE FOOTBED:


- Durable: resists compression set over time
- Resilient: recovers for next foot strike
- Mono-sided inverted Anti-Fatigue Technology cones
- Contoured bio-mechanically engineered top surface helps maintain proper gait
- Dynamic arch adapts to different foot shapes for maximum comfort

7-11 12 13 14 15 W

USA Men's	7	7.5	8	8.5	9	9.5	10	10.5	11	12	13	14	15
USA Women's	8.5	9	9.5		10	10.5	11	11.5	12				
United Kingdom	6	6.5	7	7.5	8	8.5	9	9.5	10	11	12	13	14
Europe	39	40	41	41.5	42	42.5	43	43.5	44	46	47	48	49
Centimeters	25,0	26,0	26,0	26,5	27,0	27,5	28,0	28,5	29,0	30,0	31,0	32,0	33,0



8" | COMPOSITE SAFETY TOE | WATERPROOF TB0A1RW2214

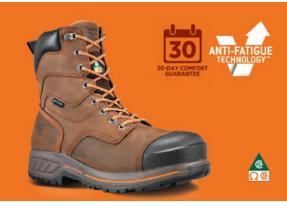





8" | COMPOSITE SAFETY TOE | WATERPROOF TB0A1RW2214



SLIP TEST RATING



No shoe is "slip proof." Footwear is one small part of any Slip Hazard Assessment Defense Program. You should always consult with your Company Safety Manager to determine the most appropriate footwear for your work environment. Using this information, it is possible to seek advice from the Manufacturer or Distributor regarding appropriate application based on test results.

EXCERPT FROM CSA Z195-09 WHOLE SHOE SLIP RESULTS

TEST REPORT: CHT0259597/1727 OUTSOLE: PR0459 TEST LAB: 12A10


The below chart provides the slip scores for the outsole of the shoe.

HEEL / TALON / TALÓN

FLAT / PLAT / PARTE PLANA

MINIMUM REQUIRED / MINIMUM REQUIS / MÍNIMO REQUERIDO

CSA Z195-09

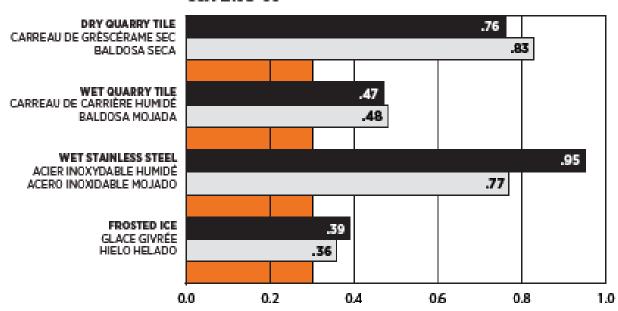



8" | COMPOSITE SAFETY TOE | WATERPROOF TB0A1RW2214





TECHNOLOGIES



Composite Safety Toe

Lightweight, non-metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-11 and ASTM F2413-11 I/75 and C/75 impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



Waterproof Membrane

Delivers maximum waterproof protection and blood-borne pathogen resistance. Meets ASTM F1671-07 safety standard.



Puncture Resistant

Flexible non-metallic plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-11, ASTM F2413-11 and ASTM F2892-11 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with



Electrical Shock Resistant

Meets CAN/CSA-Z195-14 safety standards for footwear incorporating electric shock-resistant soles.



All-Weather TPU Outsole

Specially-formulated thermoplastic urethane compound designed to maintain flexibility in variable weather conditions, providing enhanced traction on wet and frosted ice surfaces, plus slip, oil and abrasion resistance.



Insulated

Thermolite®, lightweight, non-quilted, quick-drying, moisture-resistant insulation helps keep feet warm in any weather.



Anti-Fatigue Technology

A comfort system designed with shock-absorbing, geometrical technology that returns energy back to the foot to deliver all-day support and comfort.



30-Day Comfort Guarantee

If you don't believe Timberland PRO® footwear with Anti-Fatigue Technology, PowerFit or SensorFlex are not more comfortable than the brand you're currently wearing, return them within 30 days and we'll refund your purchase price, provided you still have your dated receipt of purchase, Call 1-888-802-9947 from US and 1-800-501-3054 from Canada. Available in the United States and Canada only.